




Features

- 32CH input
- Third-party IP cameras supported with ONVIF conformance
- 2CH HDMI, 1CH VGA, 1CH CVBS, HDMI2 at up to
- 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- H.265/H.264 video formats
- Accurate retrieval, instant playback
- HDD hot swap with RAID1, 5 storage scheme configurable
- 8 SATA HDDs, Up to 8TB for each HDD
- VCA detection alarm and VCA search
- N+1 Hot spare
- 12V Power output
- P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications

VIDEO INPUT/ OUTPUT	
IP Video Input	32CH
Two-way Audio Input	1CH, RCA
NETWORK	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI 1 / VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768/60Hz 8 HDMI 2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720/60Hz, 1024x768 /60Hz
CVBS Output	1CH, BNC
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1CH, RCA
Synchronous Playback	16CH
DECODING	
Live View/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Compression	H.265 / H.264
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@20, 16 x 1080P@25, 32 x 720P@25, 64 x D1
HARD DISK	
SATA	8 SATA interfaces
Capacity	up to 8TB for each HDD
DISK ARRAY	
Array Type	RAID1, RAID5
EXTERNAL INTERFACE	
Network Interface	2 RJ -45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 2 x USB2.0, 1 x USB3.0
Alarm In / Out	16CH / 4CH
Power Output	12 VDC
GENERAL	
Power Supply	100 ~ 240VAC
Consumption (without HDD)	≤ 20W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	86 x 442 x 531 (mm) [3.4" x 17.4" x 19.9" (in.)]
Weight	≤ 5.13 Kg (11.31 lb)

Rear Panel:

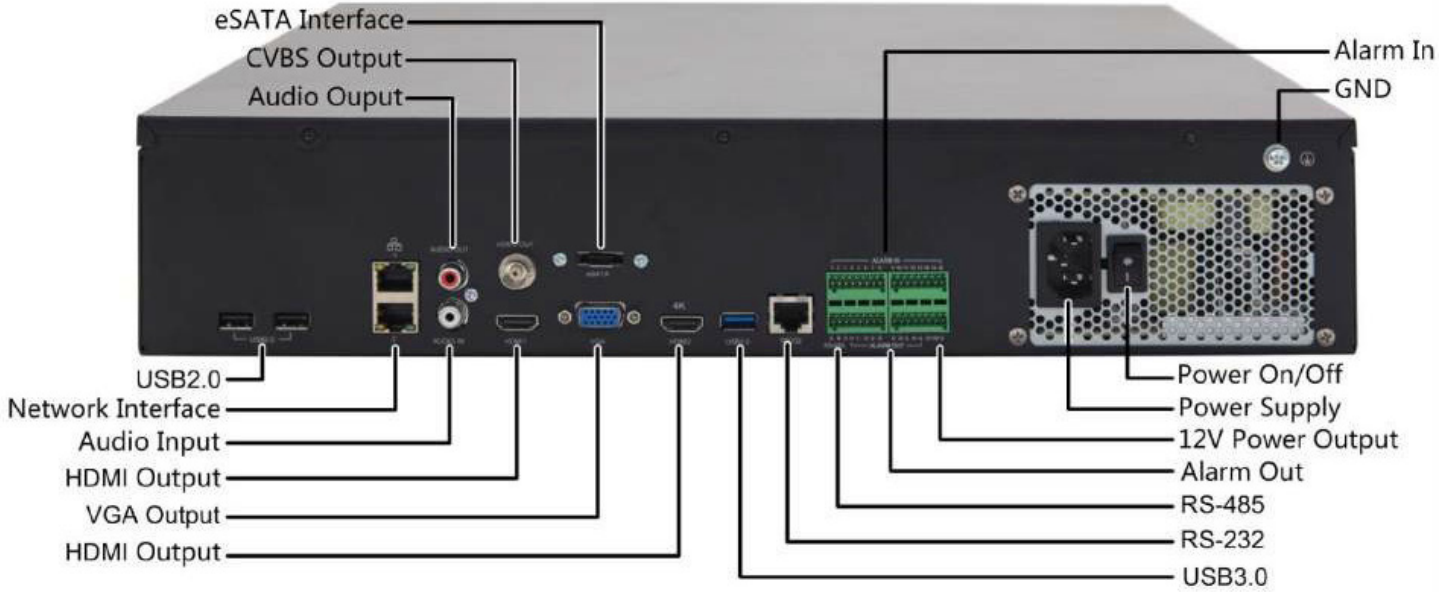

Dimensions

