




### Features

- Rated Voltage: AC 110-270V
- Charging Time: 48 hrs
- Discharge Time: >120 min
- Anti-Corrosion Grade: WF2
- Cable Entry: 8mm - 14mm cable
- Weight: 2.5 kg / 5.5 lbs
- Size: 230 x 260 x 85 mm / 9" x 10" x 3.3" in
- Ex-Proof Grade: Ex d IIB T6

### Light Distribution

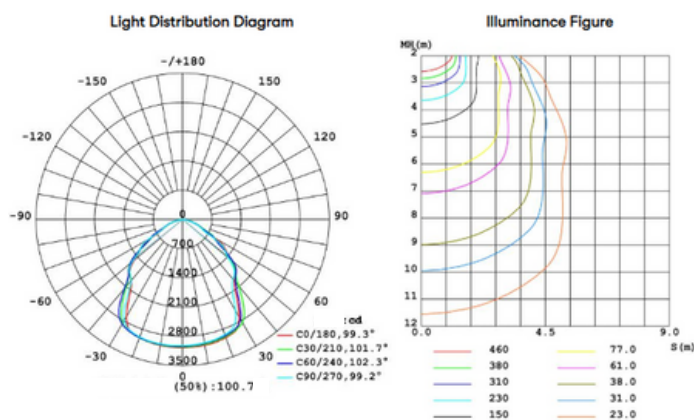

### Specifications

| GENERAL SPECIFICATIONS      |  |
|-----------------------------|--|
| Rated Voltage               | AC 220V                                |
| Power                       | 100W / 270 W                           |
| Frequency                   | 50/60 Hz                               |
| Light Efficiency            | 120 lm                                 |
| Power Factor                | >0.95 PF                               |
| Operating Temperature       | -30~50°C / -22~122°F                   |
| Storage Temperature         | -30~50°C / -22~122°F                   |
| Protection Level            | IP65                                   |
| Lighting Angle              | 38°                                    |
| Light Source                | LED                                    |
| Correlate Color Temperature | 3000-6500 K                            |
| Color Rendering Index       | ≥70 Ra                                 |
| LED Quantity                | 2 x 1 pcs                              |
| Base Specifications         | CREE3030                               |
| LED's Operating Life        | 100,000 hrs                            |
| Start-Up Time               | ≤0.2 s                                 |
| Anti-Corrosion Grade        | WF2                                    |
| Explosion-Proof Grade       | Ex d e mb IIC B T6                     |
| Executive Standard          | GB3836.1 / GB3836.2                    |
| Weight                      | 2.5 kg / 5.5 lbs                       |
| Size                        | 230 x 260 x 85 mm / 9" x 10" x 3.3" in |

### Dimensions

