




### Features

- Products can work safely in various flammable and explosive places.
- Cast aluminum alloy shell, surface spraying anti-static, corrosion-resistant, waterproof, dust-proof, can be used in high temperature, humidity, and various corrosive harsh environments for a long time.
- Transparent toughened glass protective cover, good light transmittance, impact resistant, high light flux, energy saving, environmental protection, and other advantages.
- Beautiful appearance, simple and reliable structure, easy installation; structural steel pipe or cable wiring can be used.
- Independent wiring cavity design makes wiring more convenient and fast.

### Dimensions

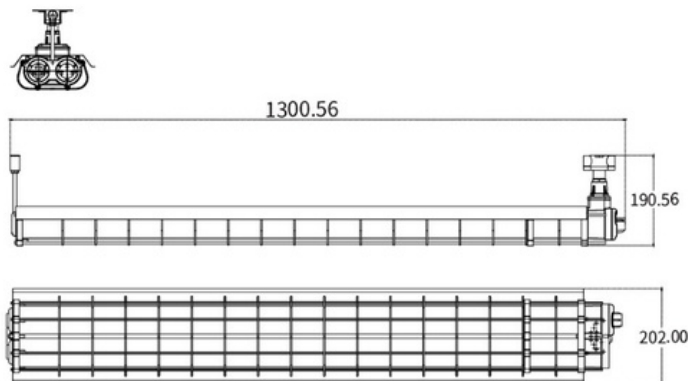

### Specifications

#### GENERAL SPECIFICATIONS

<b>Rated Voltage</b>	AC 220V
<b>Power</b>	100W / 270 W
<b>Frequency</b>	50/60 Hz
<b>Light Efficiency</b>	>90 / >120 Lm
<b>Power Factor</b>	>0.95 PF
<b>Protection Level</b>	IP65
<b>Lighting Angle</b>	360°
<b>Light Source</b>	T8 Fluorescent tube / T8 LED tube
<b>Correlate Color Temperature</b>	3000-6500 K
<b>Color Rendering Index</b>	≥70 Ra
<b>Light Quantity</b>	2 pcs
<b>LED's Operating Life</b>	50,000 hrs
<b>Start-Up Time</b>	≤0.2 s
<b>Anti-Corrosion Grade</b>	WF2
<b>Explosion-Proof Grade</b>	Ex d IIC T6
<b>Executive Standard</b>	GB3836.1 / GB3836.2
<b>Weight</b>	5.4 kg / 11.9 lbs
<b>Size</b>	1280 x 202 x 146 mm / 50" x 7.9" x 5.6" in

### Models Available

MODEL	WATTAGE
<b>2M-EX8197D-100</b>	100W
<b>2M-EX8197D-270</b>	270W

### Installation

