




### Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 2.5 kg / 5.5 lbs
- Size: 180 x 148 mm / 7" x 5.8" in
- Beam Angle: 111.1°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 20.5 x 20.5 x 21 cm / 8" x 8" x 8.2" in
- Gross Weight: 3.13 kg / 6.9 lbs

### Light Distribution

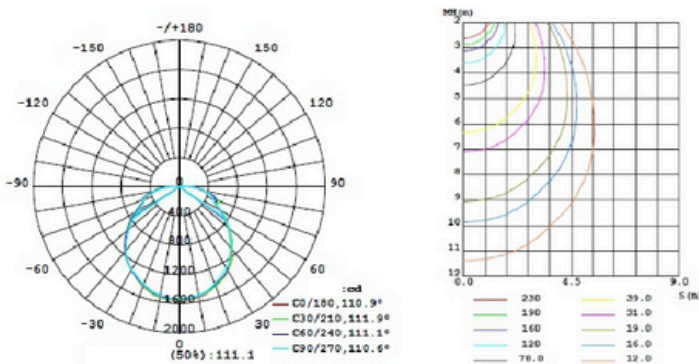

### Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	20W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	110°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	45 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIC T6 W
Executive Standard	GB3836.1 / GB3836.2
Weight	2.8 kg / 6.2 lbs
Size	180 x 211 mm / 7" x 8.3" in

### Models Available

MODEL	WATTAGE
2M-EXL8230-20	20W
2M-EXL8230-30	30W
2M-EXL8230-40	40W
2M-EXL8230-45	45W

### Dimensions

