




Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 10.5 kg / 23.1 lbs
- Size: 415 x 245 mm / 16.3" x 9.6" in
- Beam Angle: 89.4°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 44.5 x 44.5 x 31.5 cm / 17.5" x 17.5" x 12.4" in
- Gross Weight: 8.3 kg / 18.2 lbs

Light Distribution

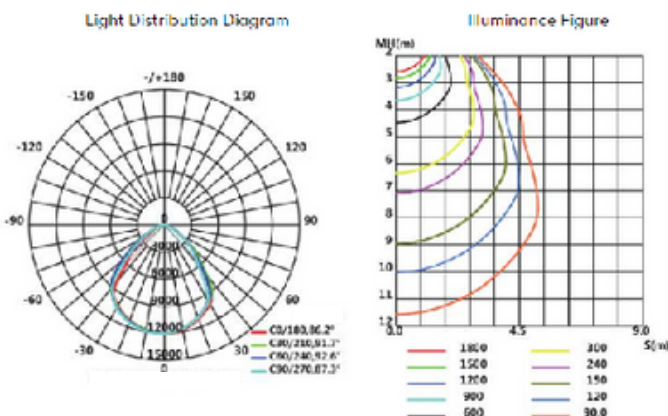

Specifications

| GENERAL SPECIFICATIONS | |
|-----------------------------|--------------------------------|
| Rated Voltage | AC220 V |
| Power | 150W |
| Frequency | 50/60 Hz |
| Light Efficiency | 120 lm |
| Power Factor | >0.95 PF |
| Operating Temperature | -30~50°C / -22~122°F |
| Storage Temperature | -30~50°C / -22~122°F |
| Protection Level | IP66 |
| Lighting Angle | 110° |
| Light Source | LED |
| Correlate Color Temperature | 3000-6500 K |
| Color Rendering Index | ≥70 Ra |
| LED Quantity | 150 pcs |
| Base Specifications | CREE3030 |
| LED's Operating Life | 100,000 hrs |
| Start-Up Time | ≤0.2 s |
| Anti-Corrosion Grade | WF2 |
| Explosion-Proof Grade | Ex d IIC T6 W |
| Executive Standard | GB3836.1 / GB3836.2 |
| Weight | 8.7 kg / 19.1 lbs |
| Size | 415 x 245 mm / 16.3" x 9.6" in |

Models Available

| MODEL | WATTAGE |
|----------------|---------|
| 2M-EXL8235-150 | 150W |
| 2M-EXL8235-200 | 200W |
| 2M-EXL8235-240 | 240W |

Dimensions

