




### Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 10.5 kg / 23.1 lbs
- Size: 415 x 245 mm / 16.3" x 9.6" in
- Beam Angle: 89.4°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 44.5 x 44.5 x 31.5 cm / 17.5" x 17.5" x 12.4" in
- Gross Weight: 8.3 kg / 18.2 lbs

### Light Distribution

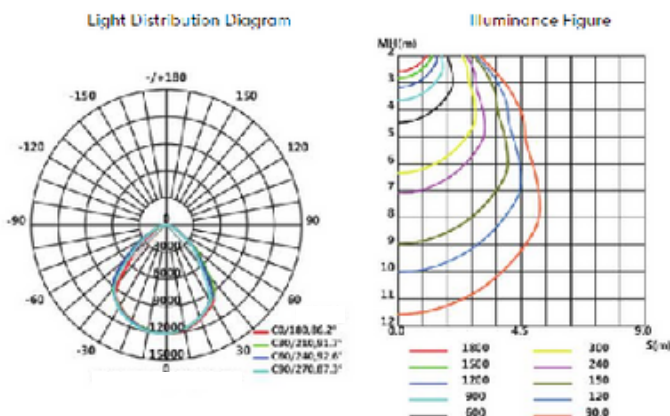

### Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC220 V
Power	200W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	110°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	150 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIC T6 W
Executive Standard	GB3836.1 / GB3836.2
Weight	8.7 kg / 19.1 lbs
Size	415 x 245 mm / 16.3" x 9.6" in

### Models Available

MODEL	WATTAGE
2M-EXL8235-150	150W
2M-EXL8235-200	200W
2M-EXL8235-240	240W

### Dimensions

