




Features

- **Configuration:** The LED light source has an average service life of up to 100,000 hours. The power supply adopts wide voltage processing, which can realize constant current output, and has short-circuit and over-voltage protection functions, which can prolong the service life of the lamp.
- **Heat Dissipation:** Explosion-proof electrical box and lamp holder double cavity design and large space size ensure the assembly of various large-scale electrical appliances. Excellent heat dissipation performance, so the LED chip and power supply temperature rise is controlled.
- **Transparent Parts:** Excellent light projection, the light is even and soft, making it suitable for a number of solutions where lighting, flood lights are needed as fixed lighting.
- **Protection:** Ingress protection for this lamp body is rated IP66, and the anti-corrosion level can reach up to WF2. The surface of the lamp body will not corrode or rust.
- **Installation Method:** Various installation methods such as ceiling, suction wall, and U-shaped anti-vibration bracket (angle adjustable) can be used as needed.

Light Distribution

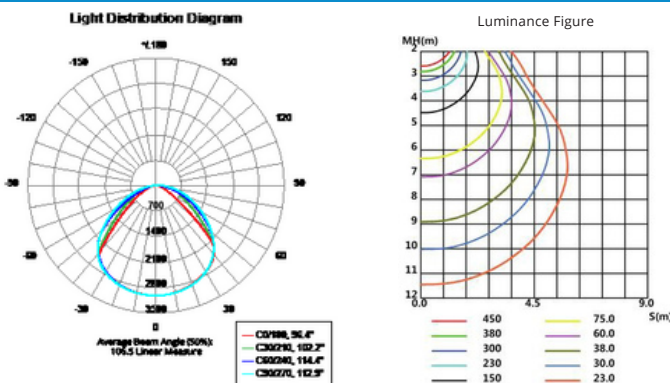

Specifications

| GENERAL SPECIFICATIONS | |
|------------------------------|--|
| Input Voltage | AC 100-240V |
| Lamp Power | 80W-100W |
| Luminous Efficacy | 120 lm/W |
| Color Rendering Index | 75 Ra |
| Lamp Luminous Flux | 1200 lm |
| IP Rating | IP66 |
| Working Lifetime | 100,000 hrs |
| Working Temperature | -30~60°C / -22~140°F |
| Certification | CCC, ce, EMC, FCC, LVD, RoHS, Saa |
| Light Source | LED |
| Driver | DONE / O-srams |
| Warranty | 3 Years / 5 Years |
| Explosion-Proof Grade | Ex d IIC T6 |
| Certificates | ATEX, CE, ROHS |
| Dimensions | 395 x 350 x 215 mm / 15.6" x 13.8" x 8.5" in |
| Weight | 1 kg / 2.2 lbs |
| Selling Units | Multiple of 4 |
| Package Size | 40 x 35 x 22 cm / 15.7" x 13.8" x 8.7" in |

Models Available

| MODEL | WATTAGE |
|--------------------------|----------|
| 2M-EXMP8260-80100 | 80W-100W |
| 2M-EXMP8260-120 | 120W |
| 2M-EXMP8260-150 | 150W |
| 2M-EXMP8260-190 | 190W |

Dimensions

