




### Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- ATEX, CE, ROHS Certified
- Lamp Luminous Efficiency: 120 lm/W
- Protection Grade: IP66
- Lamp Luminous Flux: 6000 lm
- Ex-Proof Grade: Ex d IIC T6
- High efficiency and energy saving

### Light Distribution

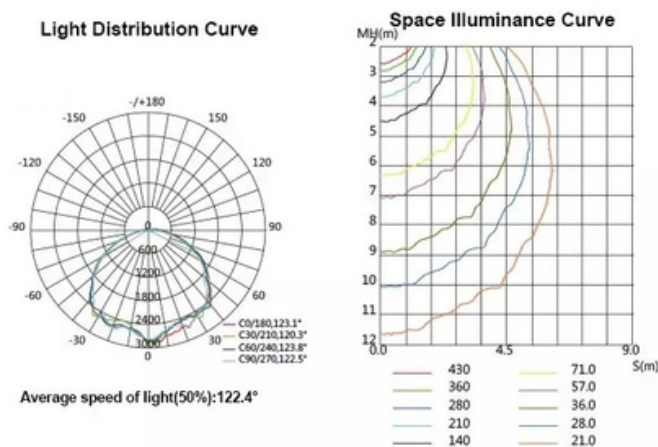

### Specifications

GENERAL SPECIFICATIONS	
Input Voltage	AC 100-270V
Warranty	3 Years
Color Rendering Index	>80 Ra
IP Rating	IP66
Working Temperature	-40~50°C / -40~122°F
Driver	Done / Mean Well driver
Explosion-Proof Grade	Ex d IIC T6
Certificates	ATEX, CE, ROHS
Weight	6.6 kg / 14.6 lbs
Luminous Efficacy	120 lm
Lamp Power	90W
Lamp Luminous Flux	6000 lm
Lifetime	100,000 hrs
Certification	CCC, ce, EMC, FCC, LVD, RoHS, Saa
Light Source	LED
Chip	Cree
Dimensions (Dia. x H)	Ø 230 x 211 mm / Ø 9" x 8.3" in

### Models Available

MODEL	WATTAGE
2M-EXS8231-50	50W
2M-EXS8231-60	60W
2M-EXS8231-80	80W
2M-EXS8231-90	90W