




Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti-Corrosion: WF2
- Weight: 4.6 kg / 10.1 lbs
- Size: 356 x 232 mm / 14" x 9.1" in
- Beam Angle: 89.4°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 38.5 x 44.5 x 31.5 cm / 15.1" x 17.5" x 12.4" in
- Gross Weight: 5.6 kg / 12.3 lbs

Light Distribution

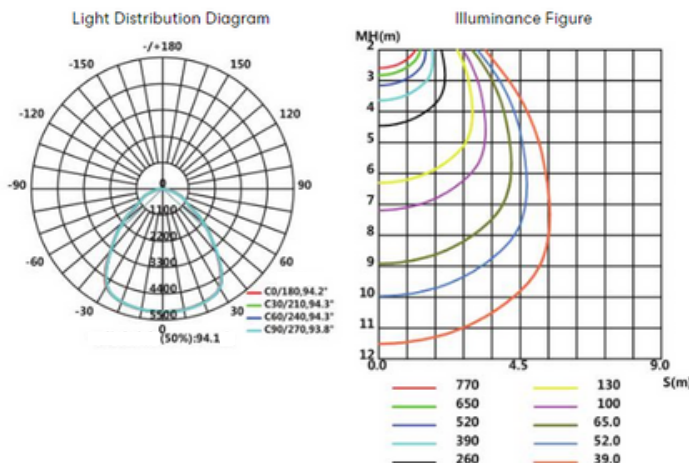

Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	120W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	95°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	150 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIC T6 W
Executive Standard	GB3836.1 / GB3836.2
Weight	8.7 kg / 19.1 lbs
Size	356 x 232 mm / 14" x 9.1" in

Models Available

MODEL	WATTAGE
2M-EXS8235-100	100W
2M-EXS8235-120	120W
2M-EXS8235-150	150W

Dimensions

