




Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 14 kg / 30 lbs
- Size: 552 x 323 x 190 mm / 21" x 12.7" x 7.4" in
- Beam Angle: 106.5°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 60.2 x 38.6 x 27.1 cm / 23.7" x 15.1" x 10.6" in
- Gross Weight: 18 kg / 39.6 lbs

Light Distribution

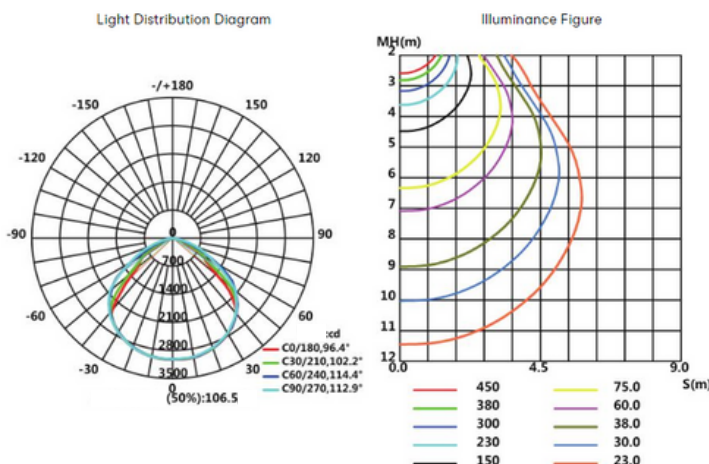

Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	380W
Frequency	50/60 Hz
Light Efficiency	120 lm/W
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	90°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	360 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIB T5
Executive Standard	GB3836.1 / GB3836.2
Weight	14 kg / 30 lbs
Size	552 x 323 x 190 mm / 21" x 12.7" x 7.4" in

Models Available

MODEL	WATTAGE
2M-EXS8266-240	240W
2M-EXS8266-300	300W
2M-EXS8266-380	380W

Dimensions

