




### Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 4.8 kg / 10.5 lbs
- Size: 300 x 186 x 174 mm / 11.8" x 7.3" x 6.8" in
- Beam Angle: 106°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 51.4 x 33.6 x 24 cm / 20" x 13.2" x 9.4" in
- Gross Weight: 10 kg / 22 lbs

### Light Distribution

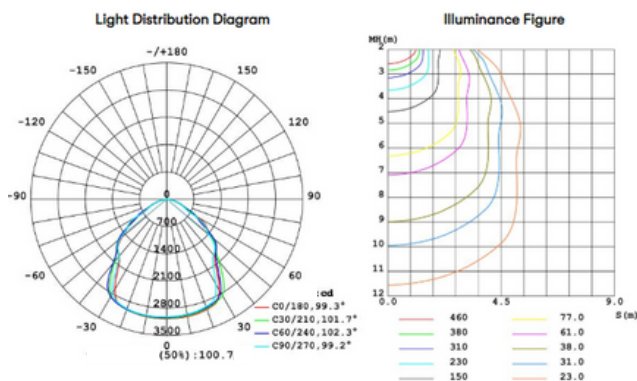

### Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	100W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	15/25/36/45/60/90/120°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	95 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIB T6
Executive Standard	GB3836.1 / GB3836.2
Weight	4.8 kg / 10.5 lbs
Size	299 x 186 x 174 mm / 11.7" x 7.3" x 6.8" in

### Models Available

MODEL	WATTAGE
2M-EXSP8260-70	70W
2M-EXSP8260-75	75W
2M-EXSP8260-100	100W
2M-EXSP8260-120	120W

### Dimensions

