




### Features

- Input Voltage: AC 100-270V
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 3.8 kg / 8.3 lbs
- Size: 230 x 166 mm / 9" x 6.5" in
- Beam Angle: 14°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 26.6 x 26.7 x 28.6 cm / 10.4" x 10.5" x 11.2" in
- Gross Weight: 4.3 kg / 9.4 lbs

### Light Distribution

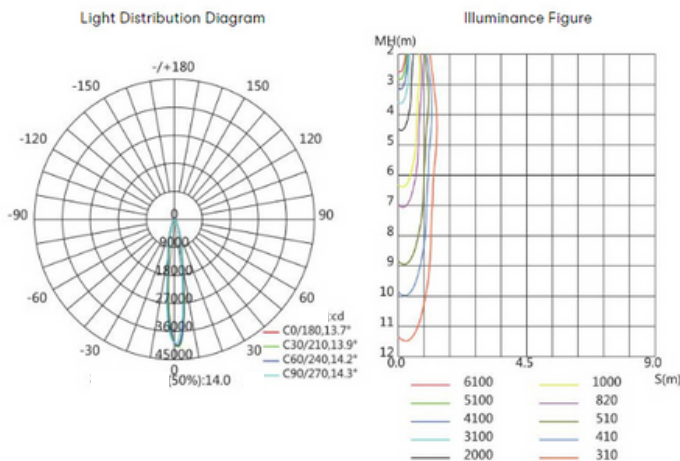

### Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	60W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	20/60/90°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	80 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIC T6 W
Executive Standard	GB3836.1 / GB3836.2
Weight	5.4 kg / 11.9 lbs
Size	230 x 166 mm / 9" x 6.5" in

### Models Available

MODEL	WATTAGE
2M-EXT8231-50	50W
2M-EXT8231-60	60W
2M-EXT8231-80	80W
2M-EXT8231-90	90W

### Dimensions

