




### Features

- Input Voltage: AC 100-270V
- LED Source: Cree
- PF: >0.95
- CRI: >75 Ra
- Protection Grade: IP66
- Lumen Flux: 120 lm/W
- Anti-Corrosion: WF2
- Weight: 6.8 kg / 14.9 lbs
- Size: 300 x 236 mm / 11.8" x 9.3" in
- Beam Angle: 14°
- Ex-Proof Grade: Ex d IIC T6
- Carton Size: 32 x 32 x 34.9 cm / 12.5" x 12.5" x 13.7" in
- Gross Weight: 7.6 kg / 16.8 lbs

### Light Distribution

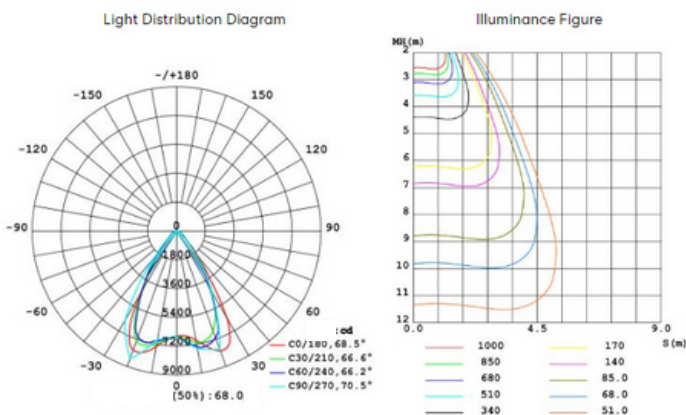

### Specifications

GENERAL SPECIFICATIONS	
Rated Voltage	AC 220V
Power	90W
Frequency	50/60 Hz
Light Efficiency	120 lm
Power Factor	>0.95 PF
Operating Temperature	-30~50°C / -22~122°F
Storage Temperature	-30~50°C / -22~122°F
Protection Level	IP66
Lighting Angle	60/90°
Light Source	LED
Correlate Color Temperature	3000-6500 K
Color Rendering Index	≥70 Ra
LED Quantity	140 pcs
Base Specifications	CREE3030
LED's Operating Life	100,000 hrs
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion-Proof Grade	Ex d IIC T6 W
Executive Standard	GB3836.1 / GB3836.2
Weight	6.8 kg / 14.9 lbs
Size	307 x 215 mm / 12" x 8.4" in

### Models Available

MODEL	WATTAGE
2M-EXT8232-50	50W
2M-EXT8232-60	60W
2M-EXT8232-80	80W
2M-EXT8232-90	90W

### Dimensions

